


# FRONIUS SMART METER

To ensure you select the right smart meter for the job, use our helpful flow chart to lead you to the correct model.

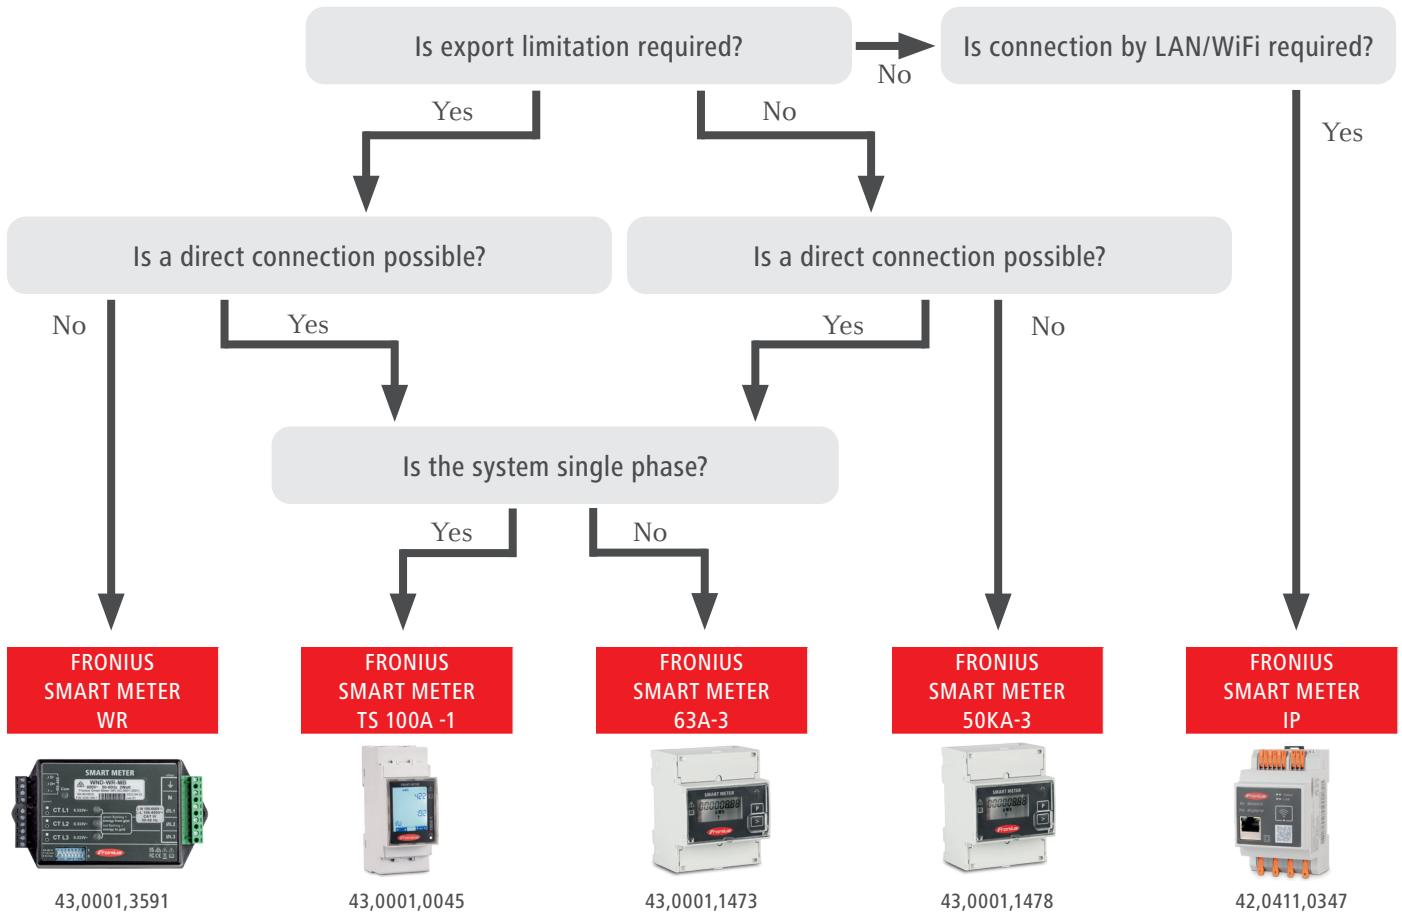

## FRONIUS SMART METER OVERVIEW

TECHNICAL DATA	FRONIUS SMART METER TS 100A -1	FRONIUS SMART METER 63A -3	FRONIUS SMART METER WR	FRONIUS SMART METER 50KA -3	FRONIUS SMART METER IP
Article No	43,0001,0045	43,0001,1473	43,0001,3591	43,0001,1478	42,0411,0347
Phases	Single Phase		Single, Two & Three Phase	Single, Two & Three Phase	Single, Two & Three Phase
CT's Required*	N/A	N/A	1/2/3 x 0.333V	1/2/3 x 5A	
100A			42,0449,0097	42,0449,0046	
150A			42,0449,0098		
250A			42,0449,0099	42,0449,0085	
400A			42,0449,0100	42,0449,0073	
Export Limitation (G100-1)	•	•	•		•
Energy Management Relay	•	•	•	•	•
Gen24 Plus / Hybrid	•	•	•	•	RTU/TCP
SnapInverter	•	•	•	•	RTU only
Ohmpilot	•	•	•	•	•
Dimensions (H x W x D)	92 x 36 x 63 mm	89 x 71.2 x 65.6 mm	85 x 143 x 38 mm	89 x 71.2 x 65.6 mm	90 x 53 x 58 mm
AC Connection	Direct Connection		6A Single / Three Phase MCB	6A Three Phase MCB	
Datamanager Firmware	3.15.X		3.23.X	3.07.X	3.25.X
Mounting	Din Rail		Threaded Fastener	Din Rail	Din Rail
Pilot Firmware			1.21.x		

\*Other CT sizes available upon request. • = compatible for