

Dip Switch Instruction (with Solis Hybrid Inverter)






Dip Switch:

(Left) -CAN 1 Dip Switch 1 & Dip Switch 2
(Right) -CAN 2 Dip Switch 1 & Dip Switch 2

Factory Delivery position: Switches not pulled ON



1 EOS 5K Installation

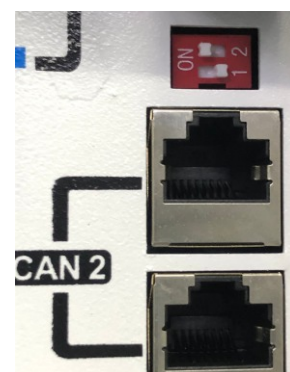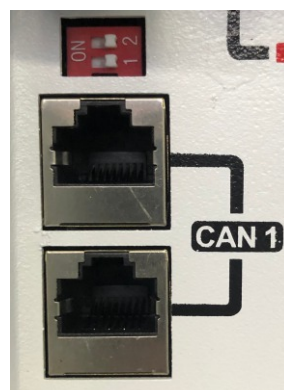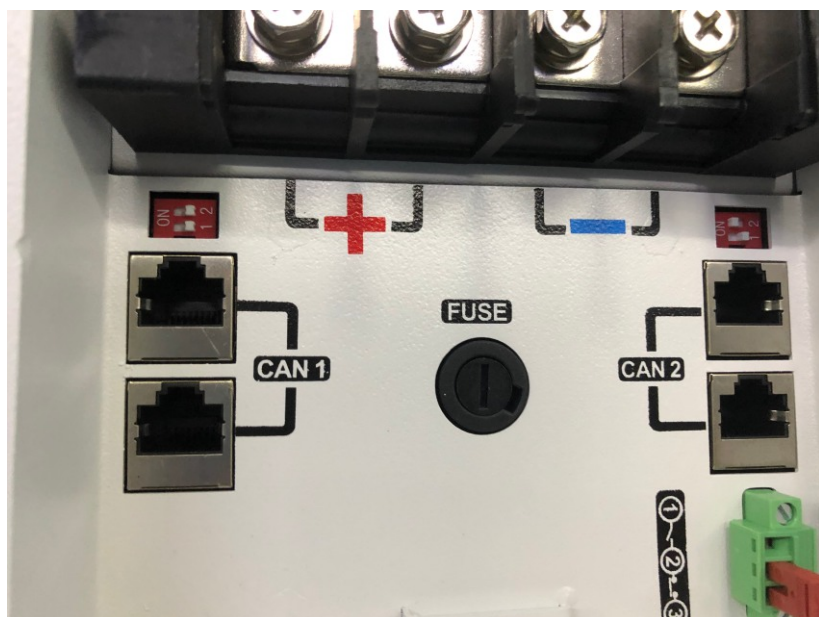

1x5K battery installation with Solis hybrid inverter:

- (Left) CAN1 Switches -Factory Position.
- (Right) CAN 2 Switch: Keep Switch 1 in factory position, pulled ON Switch 2.


Dip Switch Instruction for Multiple installation:

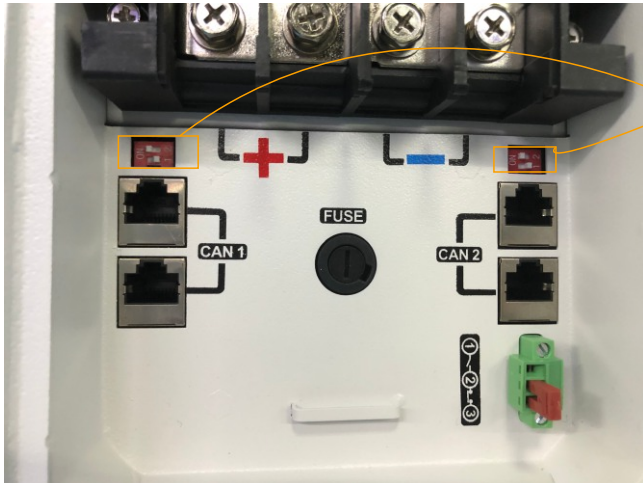


Multiple 5K batteries installation with Solis hybrid inverter:

- Pull switches only on 1st and last batteries, keep switches on factory position for middle batteries.
- 1st and last batteries position are same: CAN1 and CAN2 Switches are same - Keep Switches 1 in factory position, pulled ON Switches 2.


2x EOS 5K Parallel Installation:

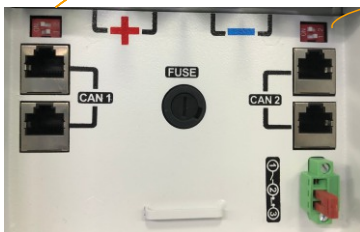


(1st Bat.)

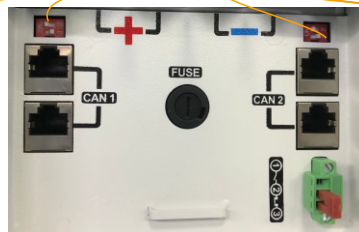


(Last Bat.)



Up to 8x EOS 5K Parallel Installation:

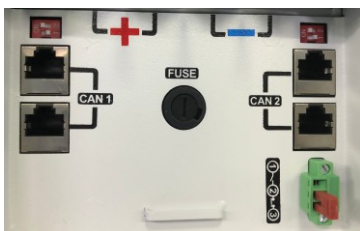


(1st Bat.)

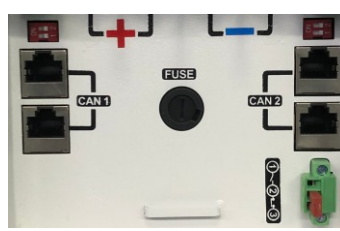

(Middle Bat.)

(... 2-7th)

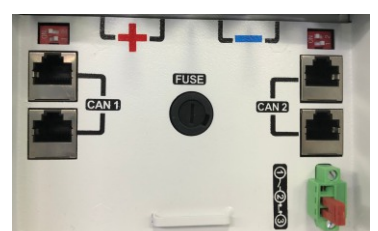

(Last Bat.)