

AUTOCHARGE:EV *SUPERFAST*

FREE-TO-USE

Type 2, Mode 3 Charging Socket(s)
11kW Or 22kW

ROLEC EV

MANUFACTURED IN THE UK



Unit shown: AUTOCHARGE:EV *SUPERFAST*
2way Socket (Type 2) Charging Pedestal

The AUTOCHARGE:EV *SUPERFAST* is a heavy duty, hard wearing EV charging pedestal, specifically designed and manufactured for both commercial and public facing environments.

This versatile, future-proof, free-to-use pedestal is available in both 1way & 2way versions, providing Mode 3 Superfast charging in 11kW or 22kW speeds.

PRODUCT FEATURES

- IEC 61851-1 Mode 3 fast charging
- Available in 1way and 2way versions
- Charging speeds - 11kW (16A) & 22kW (32A)
- IEC 62196 (Type 2) 3 phase charging socket(s) c/w security hatchlock(s)
- Can be upgraded to accommodate various pay-to-charge (PAYG) solutions
- Surface or roof mountable
- Switchgear and components behind lockable door
- Built-in overload and fault current protection (RCBO)
- Built-in LED charging status indicator
- EV driver can simply park, plug in and charge their vehicle
- OLEV Grant Fundable under the Workplace Charging Scheme
- Easy to install and maintain
- IP54 British Standard Institute (BSI) certified
- Corrosion resistant & UV stabilised
- CE certified



Superfast
3 Phase Charging



Grant
Fundable



Branding & Colour
Options Available



Strong
& Durable



IP54 Weather Proof
& UV Stabilised




Flame
Retardant

SPECIFICATIONS

PHYSICAL

Dimensions	332mm x 1275mm x 270mm (W x H x D)
Standard Body Colour	Black (Other colours available upon request)
Pedestal Material	Bodywork manufactured in heavy duty 1.5mm steel & applied with 45 - 55 microns of zinc primer
Pedestal Finish	Corrosive resistant, textured Polyester powder coating
Operating Temperature	-30°C to +50°C
Certifications & Compliances	Wiring Regulations - BS 7671 (18th Edition) IET EV Regulations, Glow Wire Testing - IEC 60695-2-13 EMC Compliance - EN 61000-6-3:2007, EN 61000-6-2:2005 Safety Compliance - EN 60950-1:2006, EN 60950-22:2006, Low Voltage Directive (LVD) 2014/35/EU Environmental Protection - IP54 (Category 1) Weatherproof BS EN 60529, UL94 Flame Rating at V2 for 1.5mm and 3.0mm

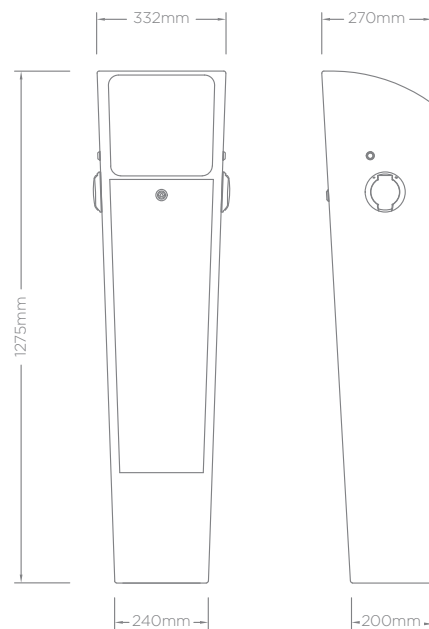

ELECTRICAL

Product Code	EVPG0012	EVPG0013	EVPG0022	EVPG0023
Charging Socket(s)	1x IEC 62196 (Type 2)	1x IEC 62196 (Type 2)	2x IEC 62196 (Type 2)	2x IEC 62196 (Type 2)
Rated Output	11kW	22kW	11kW	22kW
Rated Current	16A	32A	16A	32A
Charge Protocol	Mode 3			
EV Charging Compliance	EN 61851-1:2001, EN 61851-21:2002, EN 61851-22:2002			
Input Voltage	400V AC/50Hz (3 Phase)			
Overload & Fault Current Protection	Built-in 30mA 4P Type A RCBO & 6mA DC Sensitive Device			
Incoming Cable Terminals	1x 20A	1x 40A	2x 20A	2x 40A
	5 x 35mm			

OPTIONS & ACCESSORIES

- Key switch control charging
- Built-in class 1 MID compliant kWh meter
- Built-in time clock providing charge time management
- Corporate branding (colours, logo badge, etc.)
- Galvanised steel ground mounting base
- Protection barriers
- Charge point signage
- 3 phase EV charging cables (Type 2 to Type 2)



Images are for marketing purposes only and are not contractual © 2018



Head office contact:
t: +44 (0) 1205 724754
f: +44 (0) 1205 724876
rolec@rolecserv.co.uk

Rolec Services Ltd
Ralphs Lane, Frampton West
Boston, Lincolnshire
UK. PE20 1QU

EVAC3D-02
@RolecEV
www.rolecserv.com